
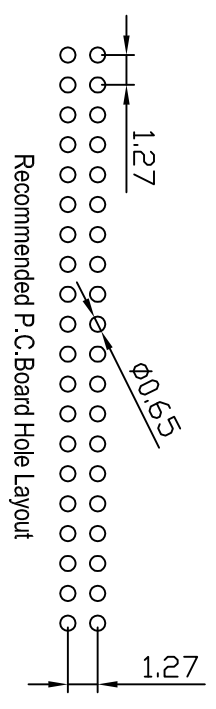
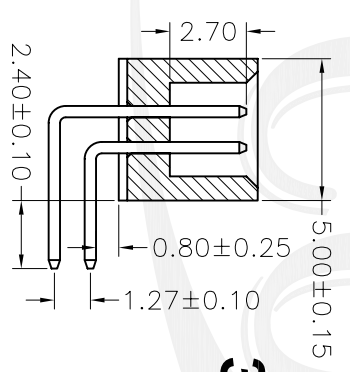
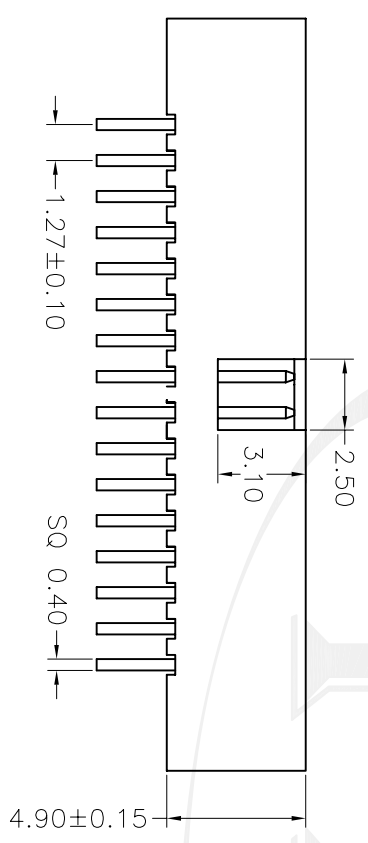


Rev No	Revision note	Date	Signature	Checked
A/0				

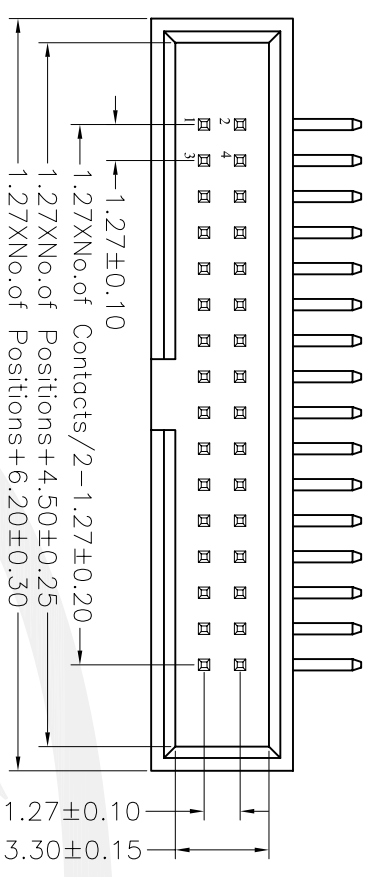

NOTES:
SPECIFICATION

Current Rating: 1.0Ampereper Contact
 Contact Resistance: 20Milliohms Max
 Insulation Resistance: 1000Megohms Min
 Dielectric Withstanding Voltage: 500V AC(for 1 minute)
 Operation Temperature: -40 °C~+105 °C

Material
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Glass Filled Polyester(UL94V-0)
 Standard: Nylon-6T

3030-XX R XX X012

NO. of Pins	Contact Plating	Color Insulator
10=10P 14=14P 16=16P 20=20P 24=24P 26=26P 30=30P 32=32P 34=34P 40=40P 44=44P 50=50P 60=60P 64=64P 80=80P 100=100P	G0=Gold Flash G1=3u" Gold G2=5u" Gold G3=10u" Gold G4=15u" Gold G5=30u" Gold S0=Gold Flash/Tin SN=Tin	B=Black W=White U=Blue R=Red Y=Yellow G=Grey

THIS DRAWING IS A CONTROLLED DOCUMENT

DMN	DATE	YTCO TECHNOLOGY HTTP://WWW.YTCO.CO	
JACK	OCT.05.2006		
CHK	DATE		
MIKE	OCT.05.2006		
TITLE	DATE		
1.27mm Box Header, RightAngle DIP			
APPD	DATE	PART NO.	
PETER	OCT.05.2006	3030-XXRXXX012	
UNITS	SCALE	DRAWING NO.	
MM	4 : 1	YT-3030R1	
SIZE	A4		
CAGE CODE	FILE PATH	SHEET	REV
00871		1 OF 1	A