
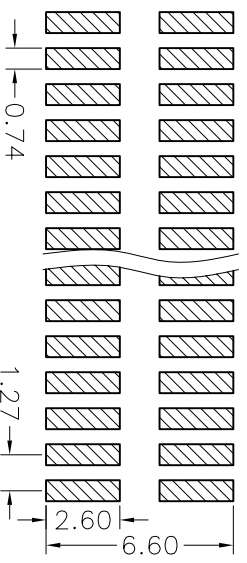
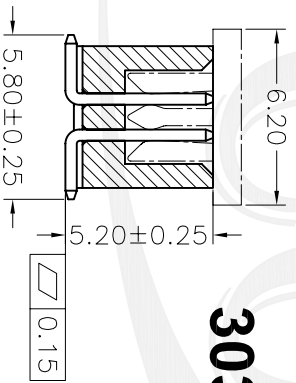
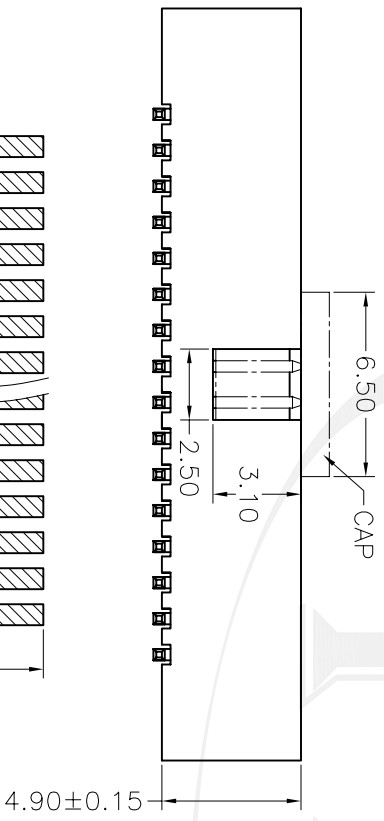


Rev No	Revision note	Date	Signature	Checked
A/0				

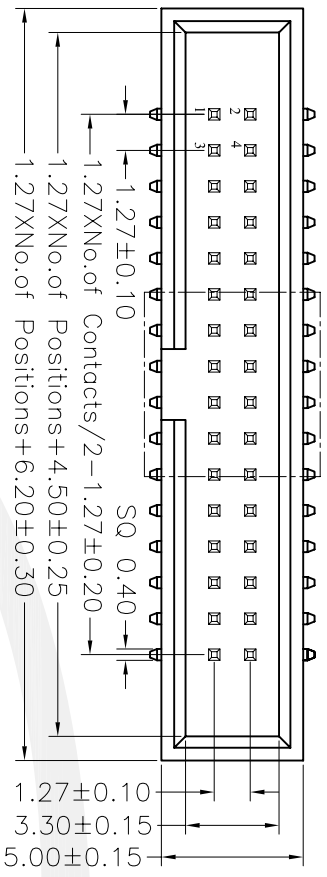

Recommended P.C.Board Hole Layout

NOTES:
SPECIFICATION

Current Rating:1.0Ampereper Contact
 Contact Resistance:20Milliohms Max
 Insulation Resistance:1000Megohms Min
 Dielectric Withstanding Voltage:500V AC(for 1 minute)
 Operation Temperature:-40°C~+105°C
Material
 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Glass Filled Polyester(UL94V-0)
 Standard:Nylon-6T

3030-XX M XX X01X

NO. of Pins	Contact Plating	Color Insulator	Packing
10=10P 14=14P 16=16P 20=20P 24=24P 26=26P 30=30P 32=32P 34=34P 40=40P 44=44P 50=50P 60=60P 64=64P 80=80P 100=100P	G0=Gold Flash G1=3u" Gold G2=5u" Gold G3=10u" Gold G4=15u" Gold G5=30u" Gold S0=Gold Flash/Tin SN=Tin	B=Black W=White U=Blue R=Red Y=Yellow G=Grey	3=Tube 4=Tube+CAP 6=Tape&Reel +CAP

THIS DRAWING IS A CONTROLLED DOCUMENT			
DMN	DATE	JACK	OCT 05 2006
CHK	DATE	MIKE	OCT 05 2006
TOLERANCES UNLESS OTHERWISE SPECIFIED			
0 PLG	±		
1 PLG	±	0.20	
3 PLG	±	0.25	
4 PLG	±	0.30	
ANGLES ± 3°			
DRAWING NO. YT-3030M1		PART NO. 3030-XXMXX01X	
DRAWING NO. YT-3030M1		TITLE 1.27mm Box Header,S.M.T	
SCALE	SIZE	DATE	FILE PATH
4:1	A4	OCT 05 2006	
CAGE CODE	00871		
SHEET 1 OF 1		REV A	



4

3

2

1

4

3

2

1