
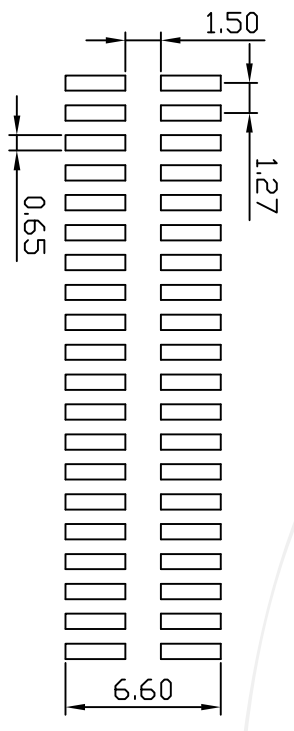

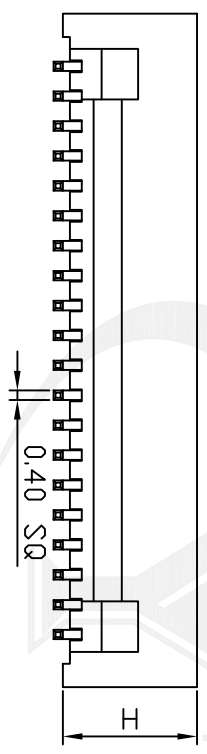


Rev No	Revision note	Date	Signature	Checked
A/0				

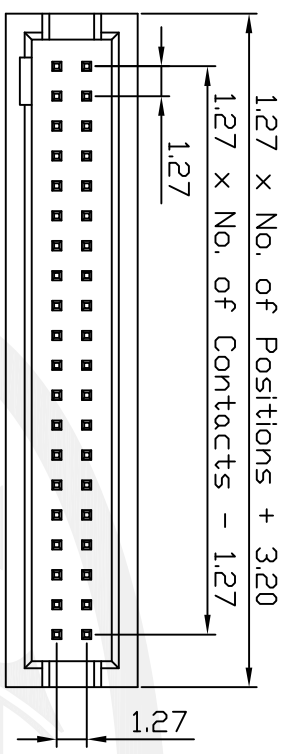

Recommended P.C. Board Layout

NOTES:
SPECIFICATION

Current Rating: 1.0Ampereper Contact
 Contact Resistance: 30Milliohms Max
 Insulation Resistance: 1000Megohms Min
 Dielectric Withstanding Voltage: 500V AC(for 1 minute)
 Operation Temperature: -40°C~+105°C
Material
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Glass Filled Polyester(UL94V-0)
 Standard: Nylon-6T

3032-XX M XX X O X X

No. of Pins 10=10P 14=14P 16=16P 20=20P 24=24P 26=26P 30=30P 32=32P 34=34P 40=40P 44=44P 50=50P 60=60P 64=64P 80=80P 100=100P	Contact Plating G0=Gold Flash G1=3u" Gold G2=5u" Gold G3=10u" Gold G4=15u" Gold G5=30u" Gold S0=Gold Flash/Tin SN=Tin	Color Insulator B=Black W=White U=Blue R=Red Y=Yellow G=Grey	Type 1=H5.4mm 2=H5.7mm	Packing 3=Tube 4=Tube+CAP 6=Tube&Reel +CAP
--	--	---	-------------------------------------	---

THIS DRAWING IS A CONTROLLED DOCUMENT

DMN	DATE	YTCO TECHNOLOGY HTTP://WWW.YTCO.CO	
JACK	OCT 05 2006		
CHK	DATE		
MIKE	OCT 05 2006		
APPD	DATE		
PETER	OCT 05 2006		
TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE	
0 PLG ± —		1.27mm Box Header, S.M.T	
1 PLG ± 0.20		PART NO. 3032-XXMXXXXXX	
3 PLG ± 0.25		DRAWING NO. YT-3032M1	
4 PLG ± 0.30		SCALE 3:1	
ANGLES ± 3°		SIZE A4	
CAGE CODE 00871		FILE PATH	

4 3 2 1