
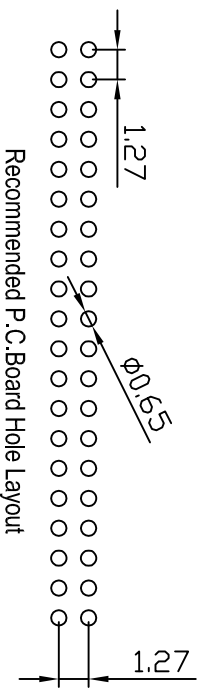
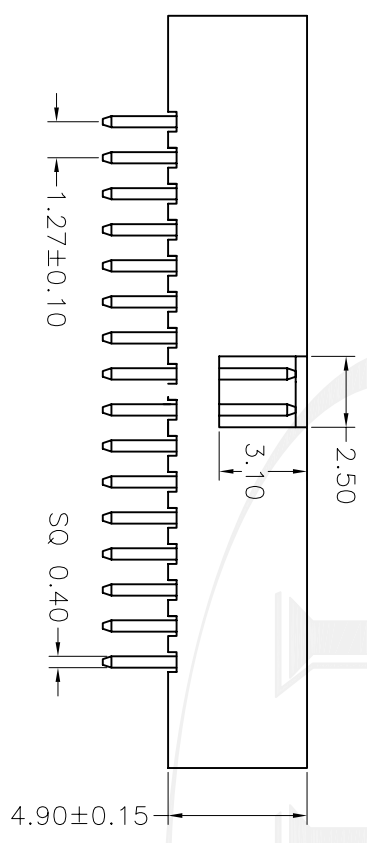


Rev No	Revision note	Date	Signature	Checked
A/0				

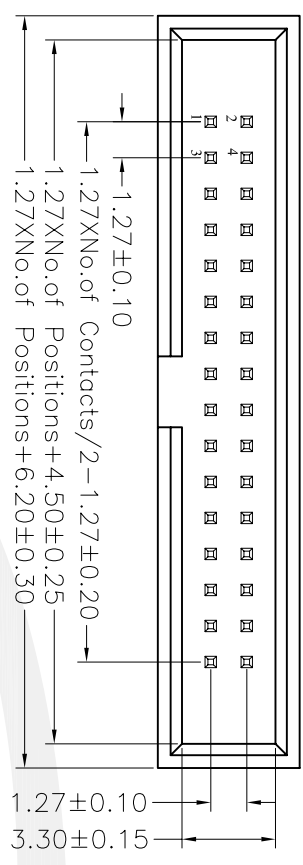

NOTES:
SPECIFICATION
 Current Rating: 1.0 Ampere per Contact
 Contact Resistance: 20 Milliohms Max
 Insulation Resistance: 1000 Megohms Min
 Dielectric Withstanding Voltage: 500V AC (for 1 minute)
 Operation Temperature: -40 °C ~ +105 °C
Material
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Glass Filled Polyester (UL 94V-0)
 Standard: Nylon-6T

NO. of Pins	Contact Plating	Color Insulator
10=10P 14=14P 16=16P 20=20P 24=24P 26=26P 30=30P 32=32P 34=34P 40=40P 44=44P 50=50P 60=60P 64=64P 80=80P 100=100P	G0=Gold Flash G1=3u" Gold G2=5u" Gold G3=10u" Gold G4=15u" Gold G5=30u" Gold S0=Gold Flash/Tin SN=Tin	B=Black W=White U=Blue R=Red Y=Yellow G=Grey

3030-XX S XX X012

THIS DRAWING IS A CONTROLLED DOCUMENT

DMN	DATE	JACK	OCT 05 2006
CHK	DATE	MIKE	OCT 05 2006
APPD	DATE	PETER	OCT 05 2006

TOLERANCES UNLESS OTHERWISE SPECIFIED

0 PLG	±	—
1 PLG	±	0.20
2 PLG	±	0.25
3 PLG	±	0.30
4 PLG	±	0.30

ANGLES ± 3°

UNIT: MM SCALE: 4:1 SIZE: A4

FILE PATH: C:\YTCO\3030S1

YTCO YTCO TECHNOLOGY
 HTTP://WWW.YTCO.CO

PART NO. 3030-XXSXXX012
 TITLE 1.27mm Box Header, Straight DIP

DRAWING NO. YT-3030S1

SHEET 1 OF 1 REV A