
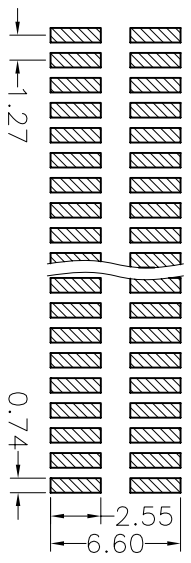

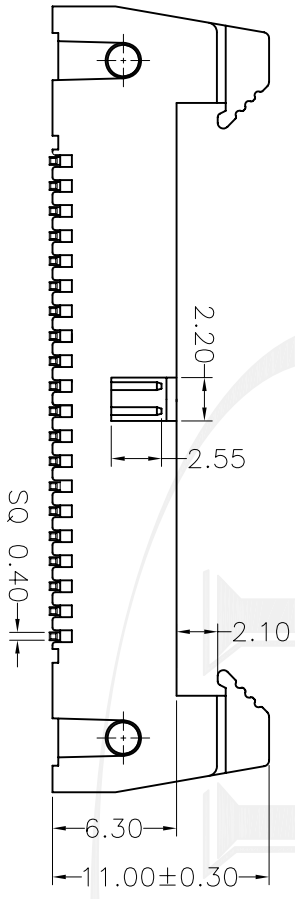


Rev No	Revision note	Date	Signature	Checked
A/0				

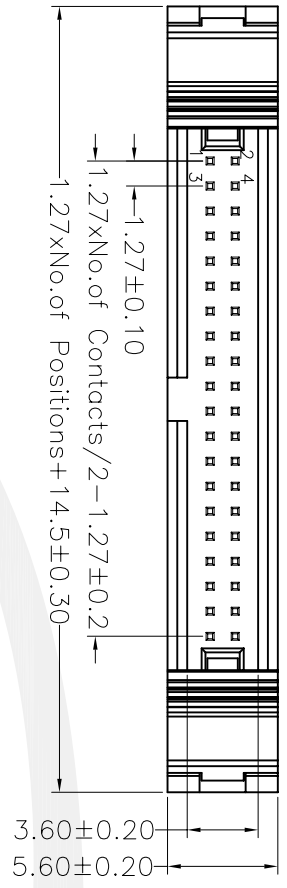

Recommended P.C. Board Hole Layout

NOTES:
SPECIFICATION
 Current Rating: 1.0 Ampere per Contact
 Contact Resistance: 20 Milliohms Max
 Insulation Resistance: 500 Megohms Min
 Dielectric Withstanding Voltage: 500V AC (for 1 minute)
 Operation Temperature: -40 °C ~ +105 °C

Material
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Glass Filled Polyester (UL94V-0)
 Standard: Nylon-6T

3230-XX M XX XS13

NO. of Pins	Contact Plating	Color Insulator
10=10P 14=14P 16=16P 20=20P 24=24P 26=26P 30=30P 34=34P 40=40P 44=44P 50=50P 60=60P	G0=Gold Flash G1=3u" Gold G2=5u" Gold G3=10u" Gold G4=15u" Gold G5=30u" Gold S0=Gold Flash/Tin SN=Tin	B=Black W=White U=Blue R=Red Y=Yellow G=Grey

THIS DRAWING IS A CONTROLLED DOCUMENT

DMN	JACK	DATE	OCT 05 2006
CHK	MIKE	DATE	OCT 05 2006
APPD	PETER	DATE	OCT 05 2006

TOLERANCES UNLESS OTHERWISE SPECIFIED

0 P.L.C.	±	—
1 P.L.C.	±	0.20
3 P.L.C.	±	0.25
4 P.L.C.	±	0.30

ANGLES ± 3°

CAGE CODE	00871	FILE PATH	
UNITS	MM	SCALE	2.5 : 1
SIZE	A4	DRAWING NO.	YT-3230M1
PART NO.	3230-XXMXXS13	TITLE	1.27mm Ejector Header, S.M.T
HTTP://WWW.YTSCO.CO			

YTSCO YTCO TECHNOLOGY
 HTTP://WWW.YTSCO.CO

SHEET 1 OF 1 REV A