


Rev No	Revision note	Date	Signature	Checked
A/0				

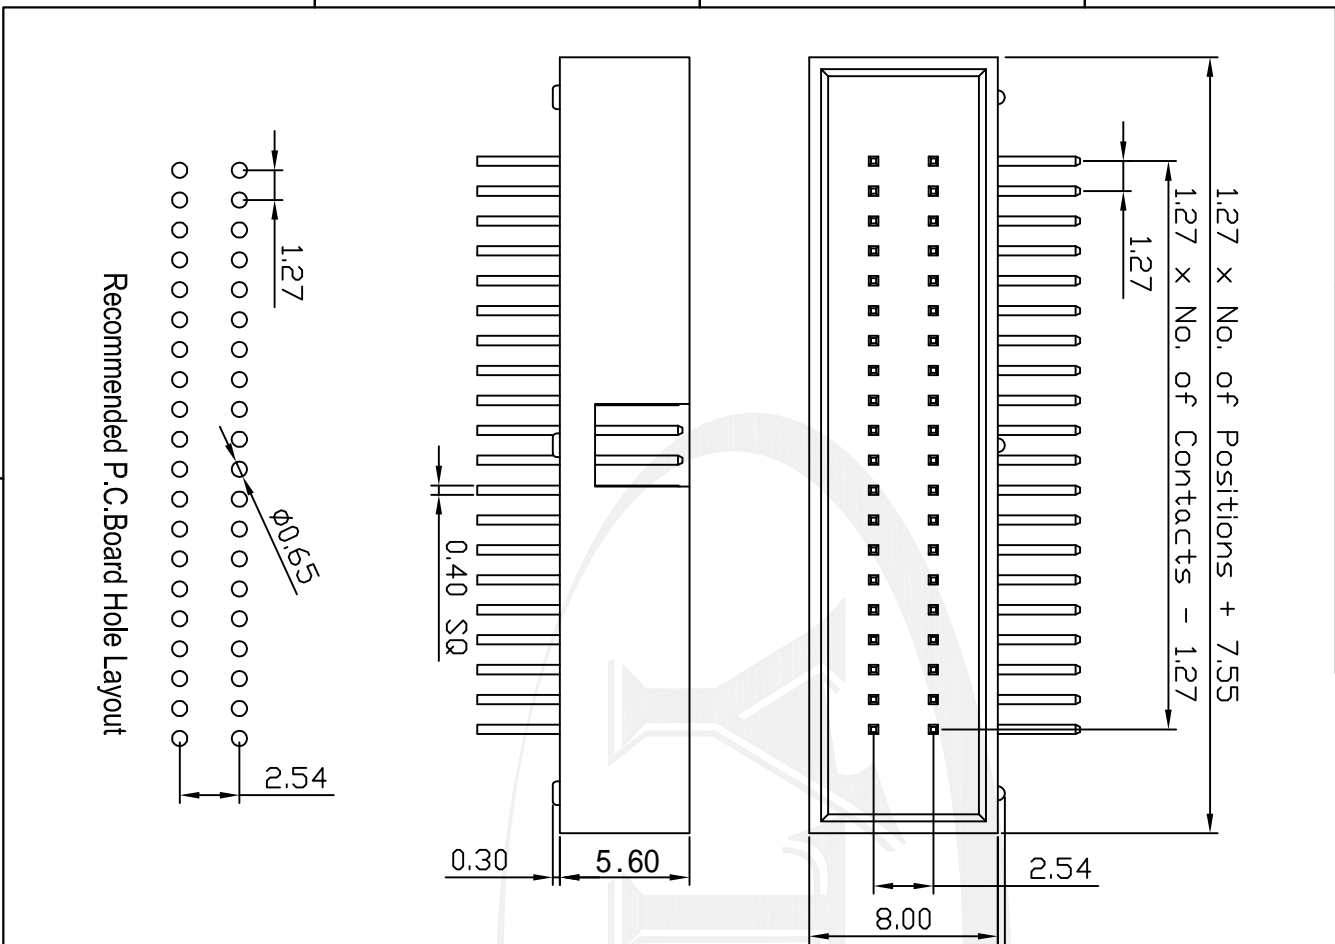

THIS DRAWING IS A CONTROLLED DOCUMENT		DATE	OCT 05 2006	DRW	JACK
DIMENSIONS INCHES		DATE	OCT 05 2006	CHK	MIKE
TOLERANCES UNLESS OTHERWISE SPECIFIED		DATE	OCT 05 2006	APPD	PETER
0 PLG	±	FILE PATH		DRAWING NO.	YT-3040R1
1 PLG	± 0.20			PART NO.	3040-XXRXXX012
2 PLG	± 0.25			TITLE	1.27x2.54mm Box Header, RightAngle DIP
3 PLG	± 0.30			SCALE	3 : 1
4 PLG	± 0.30			SIZE	A4
ANGLES ± 3°					

YTCO TECHNOLOGY HTTP://WWW.YTCO.CO	
NO. of Pins 10=10P 14=14P 16=16P 20=20P 24=24P 26=26P 30=30P 32=32P 34=34P 40=40P 44=44P 50=50P 60=60P 64=64P 80=80P 100=100P	Contact Plating G0=Gold Flash G1=3u" Gold G2=5u" Gold G3=10u" Gold G4=15u" Gold G5=30u" Gold S0=Gold Flash/Tin SN=Tin
Color Insulator B=Black W=White U=Blue R=Red Y=Yellow G=Grey	Insulator G=Grey

3040-XX R XX X012

NOTES:
SPECIFICATION
 Current Rating: 1.0Ampereper Contact
 Contact Resistance: 20Milliohms Max
 Insulation Resistance: 1000Megohms Min
 Dielectric Withstanding Voltage: 500V AC(for 1 minute)
 Operation Temperature: -40 °C~+105 °C

Material
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Glass Filled Polyester(UL94V-0)
 Standard: Nylon-6T

4 3 2 1