
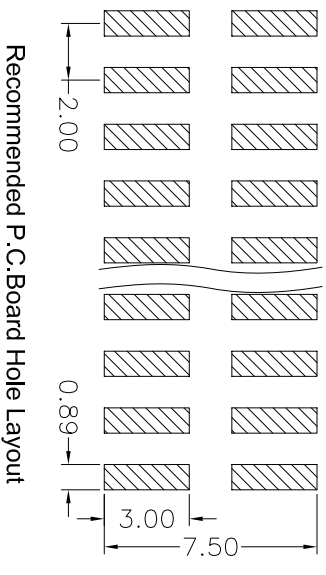

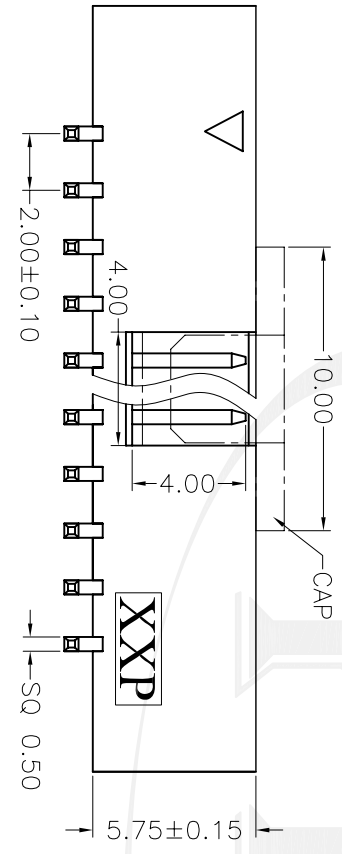


Rev No	Revision note	Date	Signature	Checked
A/0				

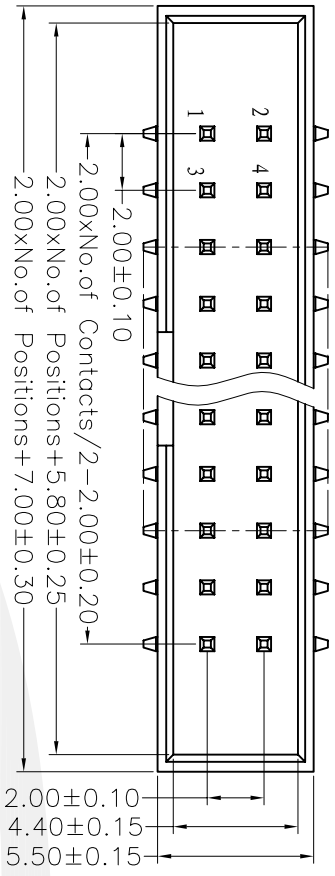

Recommended P.C. Board Hole Layout

NOTES:
SPECIFICATION

- Current Rating: 1.5 Ampere per Contact
- Contact Resistance: 20 Milliohms Max
- Insulation Resistance: 1000 Megohms Min
- Dielectric Withstanding Voltage: 500V AC (for 1 minute)
- Operation Temperature: -40 °C ~ +105 °C
- Material**
- Contact Material: Brass
- Contact Plating: Au or Sn Over Ni
- Insulator Material: Glass Filled Polyester (UL94V-0)
- Standard: Nylon-6T

3020-XX M XX X01X

NO. of Pins 10=10P 14=14P 16=16P 20=20P 24=24P 26=26P 30=30P 34=34P 40=40P 44=44P 50=50P 60=60P	Contact Plating G0=Gold Flash G1=3u" Gold G2=5u" Gold G3=10u" Gold G4=15u" Gold G5=30u" Gold S0=Gold Flash/Tin SN=Tin	Color Insulator B=Black W=White U=Blue R=Red Y=Yellow G=Grey	Packing 3=Tube 4=Tube+CAP 6=Tape&Reel +CAP
--	--	---	---

THIS DRAWING IS A CONTROLLED DOCUMENT

DMN	DATE	YTCO TECHNOLOGY HTTP://WWW.YTCO.CO
JACK	OCT.05.2006	
CHK	DATE	TITLE 2.00mm Box Header, S.M.T
MIKE	OCT.05.2006	
APPD	DATE	PART NO.
PETER	OCT.05.2006	3020-XXMXX01X
UNITS	SCALE	DRAWING NO.
MM	4 : 1	YT-3020M1
FILE PATH	SIZE	SHEET
00871	A4	1 OF 1
		REV
		A

TOLERANCES UNLESS OTHERWISE SPECIFIED

0 PLG	±	
1 PLG	±	0.20
3 PLG	±	0.25
4 PLG	±	0.30
ANGLES	±	3°