
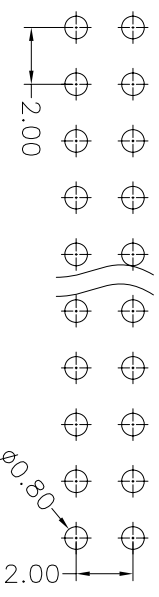
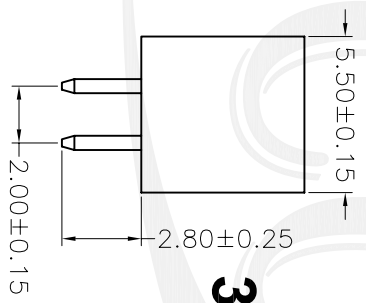
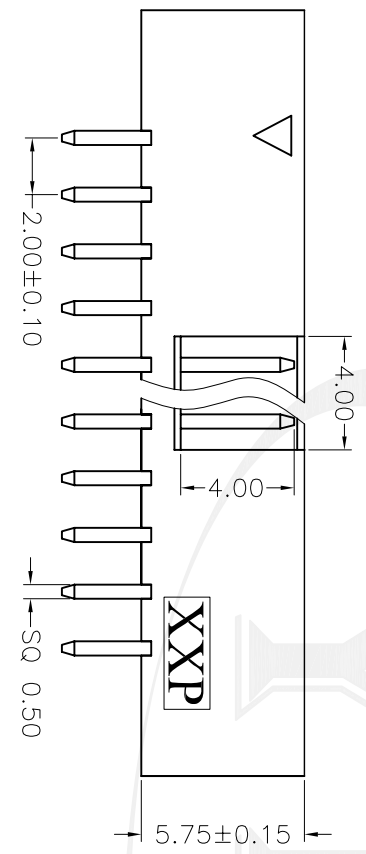


Rev No	Revision note	Date	Signature	Checked
A/0				

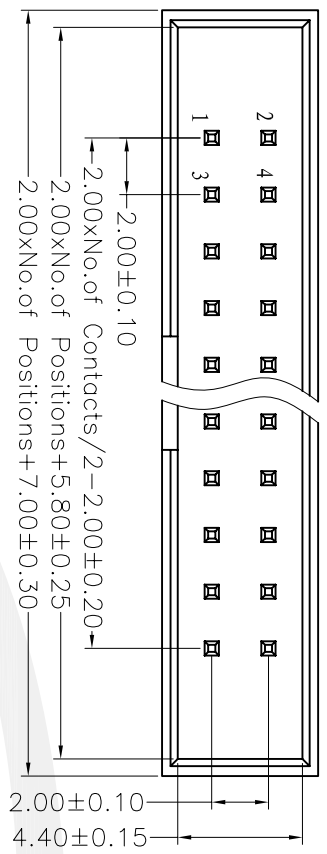

Recommended P.C. Board Hole Layout

**NOTES:**  
**SPECIFICATION**  
 Current Rating: 1.5Ampereper Contact  
 Contact Resistance: 20Milliohms Max  
 Insulation Resistance: 1000Megohms Min  
 Dielectric Withstanding Voltage: 500V AC(for 1 minute)  
 Operation Temperature: -40 °C~+105 °C

**Material**  
 Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Glass Filled Polyester(UL94V-0)  
 Standard: Nylon-6T

# 3020-XX S XX X012

<b>NO. of Pins</b>	<b>Contact Plating</b>	<b>Color Insulator</b>
10=10P 14=14P 16=16P 20=20P 24=24P 26=26P 30=30P 34=34P 40=40P 44=44P 50=50P 60=60P	G0=Gold Flash G1=3u" Gold G2=5u" Gold G3=10u" Gold G4=15u" Gold G5=30u" Gold S0=Gold Flash/Tin SN=Tin	B=Black W=White U=Blue R=Red Y=Yellow G=Grey

THIS DRAWING IS A CONTROLLED DOCUMENT			
DWN	JACK	DATE	OCT 05 2006
CHK	MIKE	DATE	OCT 05 2006
DIMENSIONS INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED	
0 PLG	±	—	
1 PLG	±	0.20	
3 PLG	±	0.25	
4 PLG	±	0.30	
ANGLES		± 3°	
CAGE CODE	FILE PATH	PART NO.	3020-XXSXXX012
00871		DRAWING NO.	YT-3020S1
TITLE		2.00mm Box Header, Straight DIP	
YTCO		YTCO TECHNOLOGY	
HTTP://WWW.YTCO.CO			
UNITS	SCALE	SIZE	A4
MM	4:1		
SHEET		1 OF 1	
REV		A	