







Rev No	Revision note	Date	Signature	Checked
A/0				

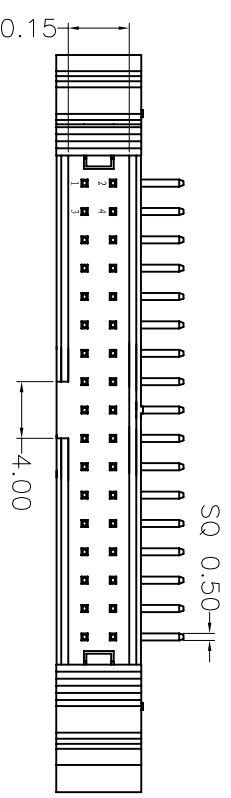

Short Latch



Long Latch

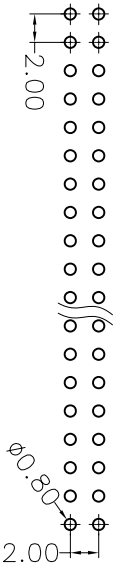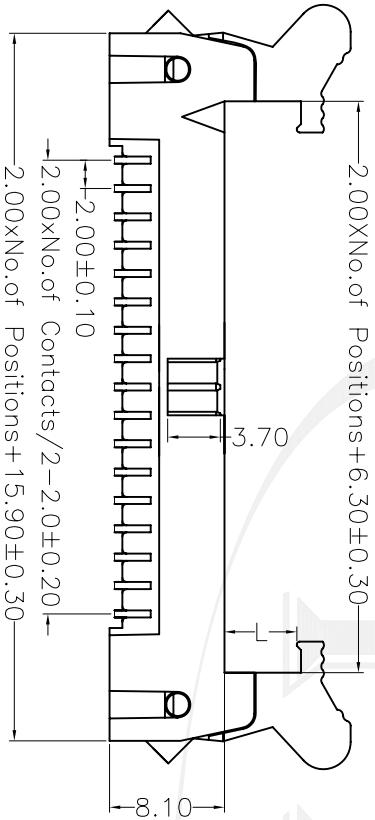

Recommended P.C. Board Hole Layout

NOTES:
SPECIFICATION

- Current Rating: 1.5Ampereper Contact
 - Contact Resistance: 20Milliohms Max
 - Insulation Resistance: 1000Megohms Min
 - Dielectric Withstanding Voltage: 500V AC(for 1 minute)
 - Operation Temperature: -40 °C~+105 °C
- Material**
- Contact Material: Brass
 - Contact Plating: Au or Sn Over Ni
 - Insulator Material: Glass Filled Polyester(UL94V-0)
 - Standard: Nylon-6T

3220-XX R XX X X12

No. of Pins	Contact Plating	Color Insulator	Latch Type
08=8P 10=10P 14=14P 16=16P 20=20P 24=24P 26=26P 30=30P 34=34P 40=40P 44=44P 50=50P 60=60P 64=64P 68=68P	G0=Gold Flash G1=3u" Gold G2=5u" Gold G3=10u" Gold G4=15u" Gold G5=30u" Gold S0=Gold Flash/Tin SN=Tin	B=Black W=White U=Blue R=Red Y=Yellow G=Grey	L=Long Latch S=Short Latch N=Without Latch

THIS DRAWING IS A CONTROLLED DOCUMENT

DMN	DATE	YTCO	YTCO TECHNOLOGY
JACK	OCT 05, 2006	HTTP://WWW.YTCO.CO	
CHK	DATE	TITLE	
MIKE	OCT 05, 2006	2.00mm Ejector Header, RightAngle DIP	
APPD	DATE	PART NO.	3220-XXRXXXX12
PETER	OCT 05, 2006	DRAWING NO.	YT-3220R1
UNITS	SCALE	SIZE	A4
MM	2 : 1	FILE PATH	
CAGE CODE	00871	SHEET	1 OF 1
ANGLES	± 3°	REV	A

4 3 2 1