





Rev No	Revision note	Date	Signature	Checked
A/0				

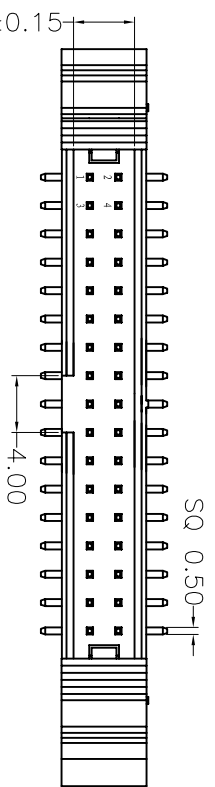



Short Latch



Long Latch



Dimension antitheses list	
ITEM	W
Standard	8.90
Alternate	

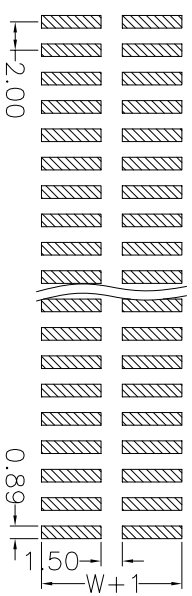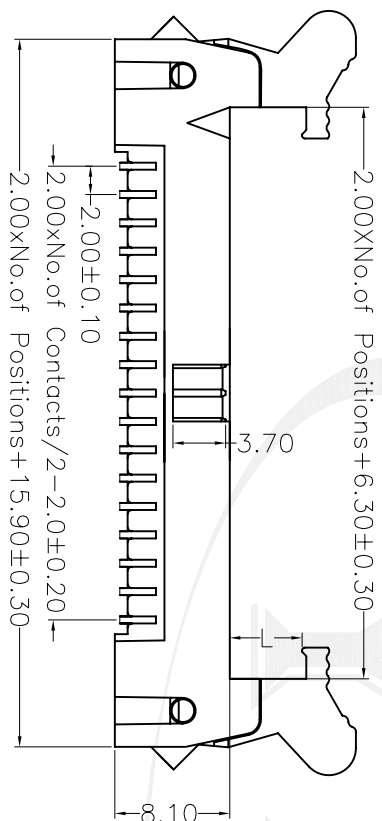

Recommended P.C. Board Hole Layout

NOTES:
SPECIFICATION
 Current Rating:1.5Ampereper Contact
 Contact Resistance:20Milliohms Max
 Insulation Resistance:1000Megohms Min
 Dielectric Withstanding Voltage:500V AC(for 1 minute)
 Operation Temperature:-40 °C~+105 °C

Material
 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Glass Filled Polyester(UL94V-0)
 Standard:Nylon-6T

3220-XX M XX X X12

NO. of Pins 08=8P 10=10P 14=14P 16=16P 20=20P 24=24P 26=26P 30=30P 34=34P 40=40P 44=44P 50=50P 60=60P 64=64P 68=68P	Contact Plating G0=Gold Flash G1=3u" Gold G2=5u" Gold G3=10u" Gold G4=15u" Gold G5=30u" Gold S0=Gold Flash/Tin SN=Tin	Color Insulator B=Black W=White U=Blue R=Red Y=Yellow G=Grey	Latch Type L=Long Latch S=Short Latch N=Without Latch
--	--	---	---

THIS DRAWING IS A CONTROLLED DOCUMENT
 DIMENSIONS INCHES
 TOLERANCES UNLESS OTHERWISE SPECIFIED
 0 PLC ± —
 1 PLC ± 0.20
 2 PLC ± 0.25
 3 PLC ± 0.30
 4 PLC ± 0.30
 ANGLES ± 3°

DMN	JACK	DATE	OCT 05 2006	YTCO TECHNOLOGY HTTP://WWW.YTCO.CO
CHK	MIKE	DATE	OCT 05 2006	
APPD	PETER	DATE	OCT 05 2006	TITLE 2.00mm Ejector Header, S.M.T
UNITS	MM	SCALE	2 : 1	
CAGE CODE	00871	FILE PATH		PART NO. 3220-XXMXXXXX12
DRAWING NO.	YT-3220M1	SHEET	1 OF 1	