






Rev No	Revision note	Date	Signature	Checked
A/0				

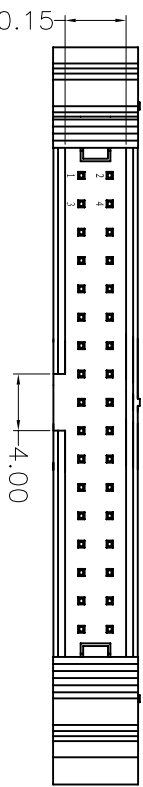

Short Latch



Long Latch

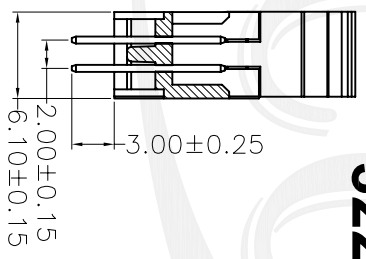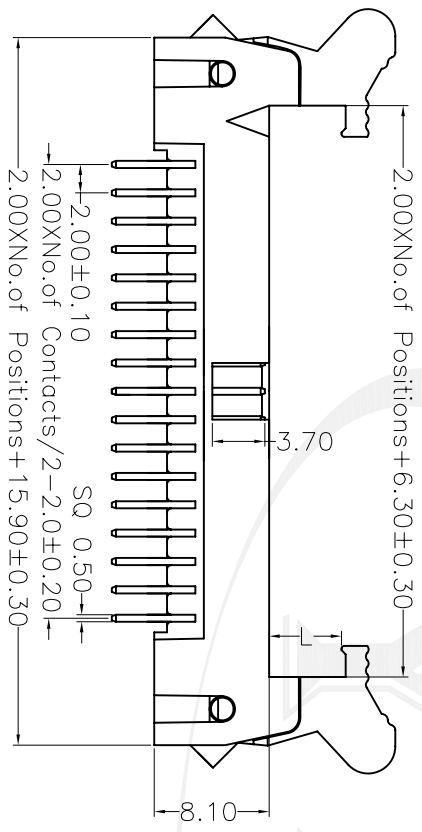


NOTES:
SPECIFICATION
 Current Rating:1.5Ampereper Contact
 Contact Resistance:20Milliohms Max
 Insulation Resistance:1000Megohms Min
 Dielectric Withstanding Voltage:500V AC(for 1 minute)
 Operation Temperature:-40 °C~+105 °C

Material
 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Glass Filled Polyester(UL94V-0)
 Standard:Nylon-6T

3220-XX S XX X X12

NO. of Pins	Contact Plating	Color Insulator	Latch Type
08=8P 10=10P 14=14P 16=16P 20=20P 24=24P 26=26P 30=30P 34=34P 40=40P 44=44P 50=50P 60=60P 64=64P 68=68P	G0=Gold Flash G1=3u" Gold G2=5u" Gold G3=10u" Gold G4=15u" Gold G5=30u" Gold S0=Gold Flash/Tin SN=Tin	B=Black W=White U=Blue R=Red Y=Yellow G=Grey	L=Long Latch S=Short Latch N=Without Latch

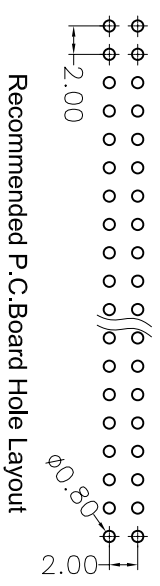

Recommended P.C. Board Hole Layout

THIS DRAWING IS A CONTROLLED DOCUMENT			
DMN	JACK	DATE	OCT 05 2006
CHK	MIKE	DATE	OCT 05 2006
APPD	PETER	DATE	OCT 05 2006
TITLE	2.00mm Ejector Header, Straight DIP		
DIMENSIONS INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED	
0 PLG	±		
2 PLG	±	0.20	
3 PLG	±	0.25	
4 PLG	±	0.30	
ANGLES		± 3°	
CAGE CODE	FILE PATH	DRAWING NO.	YT-3220S1
00871		PART NO.	3220-XXSXXXX12
SCALE		2 : 1	
UNITS		MM	
SIZE		A4	
SHEET		1 OF 1	
REV		A	



4

3

2

1

4

3

2

1