

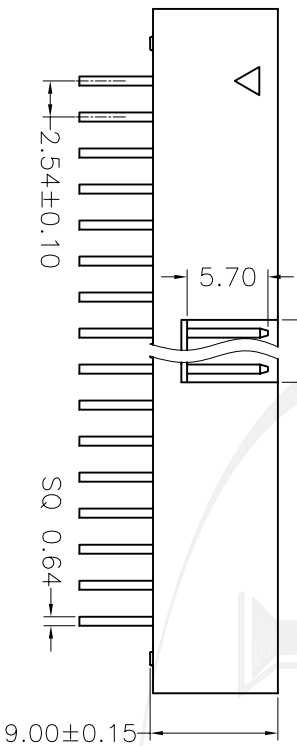


Rev No	Revision note	Date	Signature	Checked
A/0				

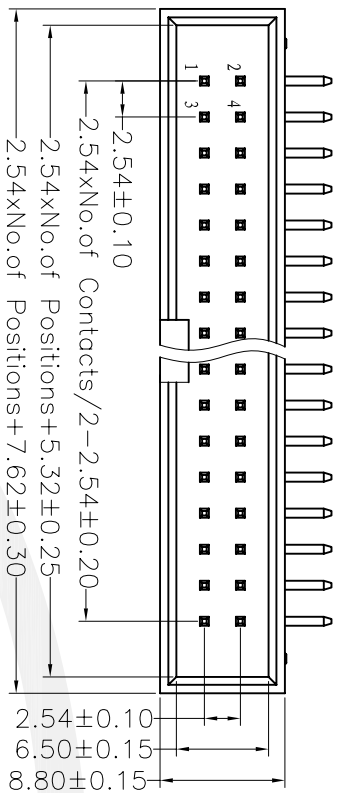

NOTES:
SPECIFICATION


Current Rating:3.0Ampereper Contact
 Contact Resistance:20Milliohms Max
 Insulation Resistance:1000Megohms Min
 Dielectric Withstanding Voltage:500V AC(for 1 minute)
 Operation Temperature:-40°C~+105°C

Material

Contact Material:Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material:Glass Filled Polyester(UL94V-0)
 Standard: PBT

3010-XX R XX X012

NO. of Pins	Contact Plating	Color Insulator
06=6P 08=8P 10=10P 12=12P 14=14P 16=16P 18-18P 20=20P 24=24P 26=26P 30=30P 34=34P 40=40P 50=50P 60=60P 64=64P	G0=Gold Flash G1=3u" Gold G2=5u" Gold G3=10u" Gold G4=15u" Gold G5=30u" Gold S0=Gold Flash/Tin SN=Tin	B=Black W=White U=Blue R=Red Y=Yellow G=Grey



Recommended P.C. Board Hole Layout

Dimension antitheses list	
N.O. Pin	L
6P-8P	4.00
10P-64P	4.40

THIS DRAWING IS A CONTROLLED DOCUMENT			
DMN	JACK	DATE	OCT.05.2006
CHK	MIKE	DATE	OCT.05.2006
APVD	PETER	DATE	OCT.05.2006
TITLE	2.54mm Box Header, RightAngle DIP		
PART NO.	3010-XXRXXX012		
DRAWING NO.	YT-3010R1		
DATE	OCT.05.2006	SIZE	A4
UNITS	MM	SCALE	2:1
FILE PATH	00871		
CAGE CODE	00871		
REV	1 OF 1	A	



4

3

2

1