

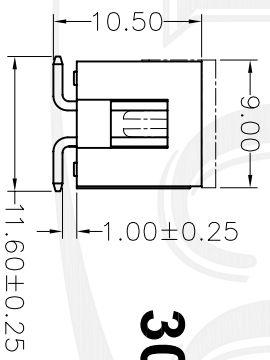
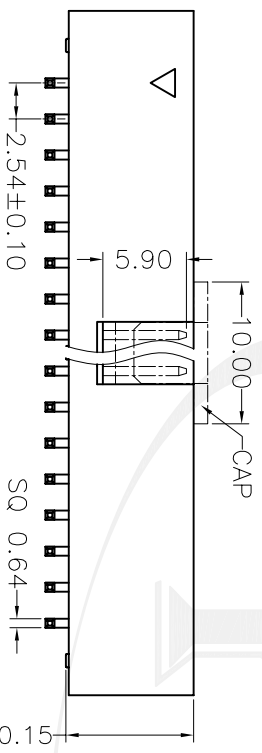


Rev No	Revision note	Date	Signature	Checked
A/0				

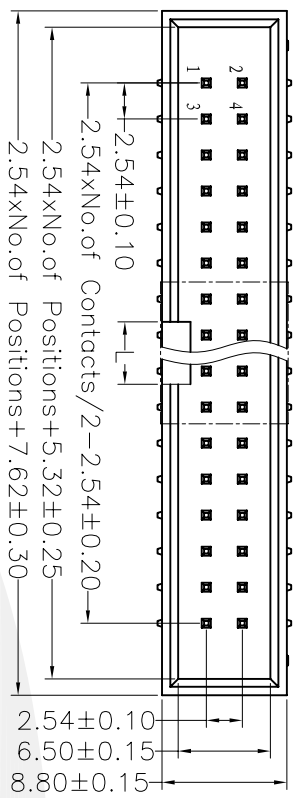

Dimension antitheses list	
N.O. Pin	L
6P-8P	4.00
10P-64P	4.40

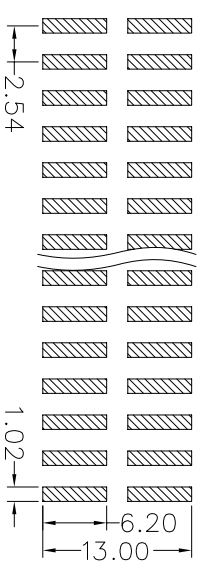

Recommended P.C. Board Hole Layout

NOTES:
SPECIFICATION

Current Rating: 3.0Ampereper Contact
 Contact Resistance: 20Milliohms Max
 Insulation Resistance: 1000Megohms Min
 Dielectric Withstanding Voltage: 500V AC(for 1 minute)
 Operation Temperature: -40°C ~ +105°C

Material
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Glass Filled Polyester(UL94V-0)
 Standard: Nylon-6T

3010-XX M XX X01X

NO. of Pins	Contact Plating	Color Insulator	Packing
06=6P 08=8P	G0=Gold Flash	B=Black	3=Tube
10=10P 12=12P	G1=3u" Gold	W=White	4=Tube+CAP
14=14P 16=16P	G2=5u" Gold	U=Blue	5=Tape&Reel
18=18P 20=20P	G3=10u" Gold	R=Red	+CAP
24=24P 26=26P	G4=15u" Gold	Y=Yellow	
30=30P 34=34P	G5=30u" Gold	G=Grey	
40=40P 50=50P	S0=Gold Flash/Tin		
60=60P 64=64P	SN=Tin		

THIS DRAWING IS A CONTROLLED DOCUMENT

DIMENSIONS INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED
0 PLG	± —
1 PLG	± 0.20
2 PLG	± 0.25
3 PLG	± 0.30
4 PLG	± 0.30
ANGLES	± 3°

SWN	DATE	CHK	DATE	TITLE
JACK	OCT 05 2006	MIKE	OCT 05 2006	2.54mm Box Header, S.M.T

YTCO YTCO TECHNOLOGY
 HTTP://WWW.YTCO.CO

UNITS	SCALE	SIZE	DRAWING NO.	PART NO.
MM	2 : 1	A4	YT-3010M1	3010-XXMXX01X

CAGE CODE: 00871 FILE PATH:
 SHEET 1 OF 1 REV A