






Rev No	Revision note	Date	Signature	Checked
A/0				



Long Latch

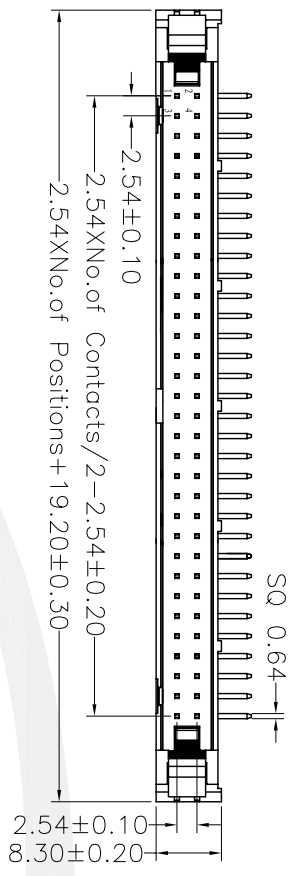

Short Latch

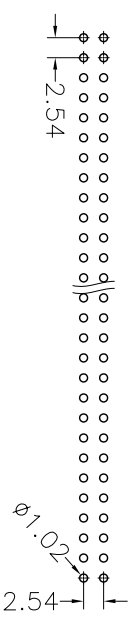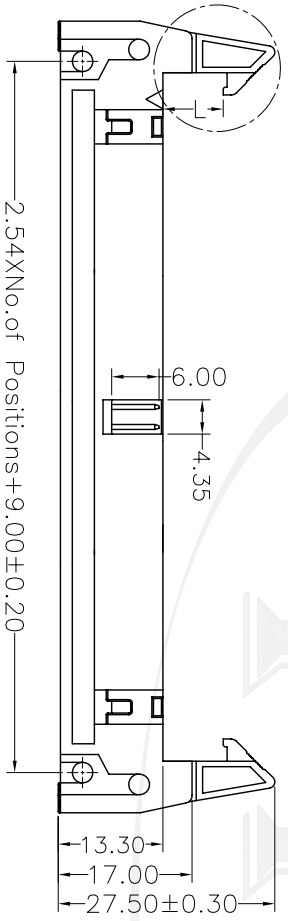

Recommended P.C.Board Hole Layout

**NOTES:**  
**SPECIFICATION**

- Current Rating:3.0Ampereper Contact
  - Contact Resistance:20Milliohms Max
  - Insulation Resistance:1000Megohms Min
  - Dielectric Withstanding Voltage:1000V AC(for 1 minute)
  - Operation Temperature:-40 °C~+105°C
- Material**
- Contact Material:Brass
  - Contact Plating: Au or Sn Over Ni
  - Insulator Material: Glass Filled Polyester(UL94V-0)
  - Standard: PBT

**3210-XX R XX X X12**

<b>NO. of Pins</b>	06=6P 08=8P 10=10P 12=12P 14=14P 16=16P 18=18P 20=20P 24=24P 26=26P 30=30P 34=34P 40=40P 50=50P 60=60P 64=64P	<b>Contact Plating</b>	G0=Gold Flash G1=3u" Gold G2=5u" Gold G3=10u" Gold G4=15u" Gold G5=30u" Gold S0=Gold Flash/Tin SN=Tin	<b>Color Insulator</b>	B=Black W=White U=Blue R=Red Y=Yellow G=Grey	<b>Latch Type</b>	L=Long Latch S=Short Latch N=Without Latch
--------------------	--	------------------------	--	------------------------	---	-------------------	--

THIS DRAWING IS A CONTROLLED DOCUMENT

DMN	JACK	DATE	OCT.05.2006
CHK	MIKE	DATE	OCT.05.2006
APPD	PETER	DATE	OCT.05.2006

TOLERANCES UNLESS OTHERWISE SPECIFIED

0 P.L.C.	±	—
1 P.L.C.	±	0.20
3 P.L.C.	±	0.25
4 P.L.C.	±	0.30

ANGLES ± 3°

**YTCO** YTCO TECHNOLOGY  
HTTP://WWW.YTCO.CO

TITLE: 2.54mm Ejector Header, RightAngle DIP

PART NO.: 3210-XXRXXXX12

DRAWING NO.: YT-3210R1

SCALE: 1:1

SIZE: A4

FILE PATH: 00871

SHEET: 1 OF 1

REV: A

4

3

2

1