






Rev No	Revision note	Date	Signature	Checked
A/0				



Long Latch

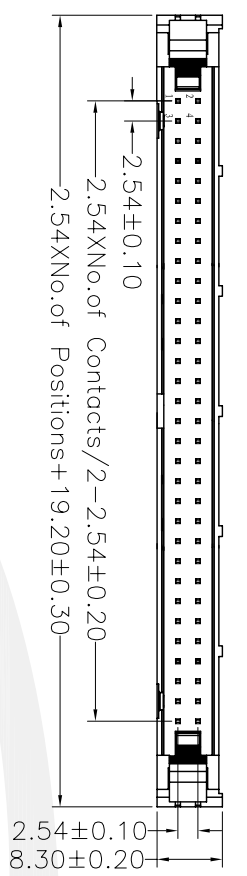

Short Latch

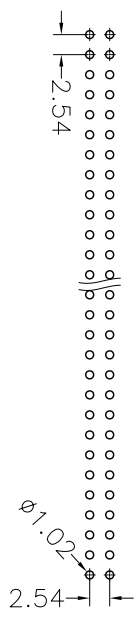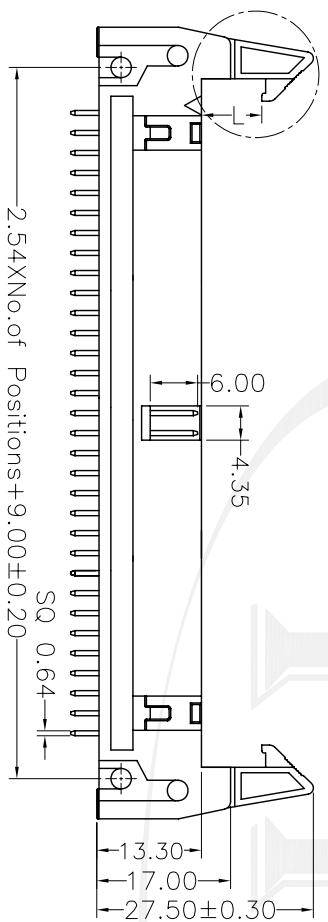

Recommended P.C.Board Hole Layout

**NOTES:**  
**SPECIFICATION**  
 Current Rating:3.0Ampereper Contact  
 Contact Resistance:20Milliohms Max  
 Insulation Resistance:1000Megohms Min  
 Dielectric Withstanding Voltage:1000V AC(for 1 minute)  
 Operation Temperature:-40 °C~+105 °C

**Material**  
 Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Glass Filled Polyester(UL94V-0)  
 Standard:PB/T

# 3210-XX S XX X X12

NO. of Pins	Contact Plating	Color Insulator	Latch Type
06=6P 08=8P 10=10P 12=12P 14=14P 16=16P 18=18P 20=20P 24=24P 26=26P 30=30P 34=34P 40=40P 50=50P 60=60P 64=64P	G0=Gold Flash G1=3u" Gold G2=5u" Gold G3=10u" Gold G4=15u" Gold G5=30u" Gold S0=Gold Flash/Tin SN=Tin	B=Black W=White U=Blue R=Red Y=Yellow G=Grey	L=Long Latch S=Short Latch N=Without Latch

THIS DRAWING IS A CONTROLLED DOCUMENT

DMN	DATE	JACK	OCT.05.2006
CHK	DATE	MIKE	OCT.05.2006
APPD	DATE	PETER	OCT.05.2006

TOLERANCES UNLESS OTHERWISE SPECIFIED

0 PLG	±	—
1 PLG	±	0.20
3 PLG	±	0.25
4 PLG	±	0.30

ANGLES ± 3°

SCALE 1:1

SIZE A4

FILE PATH 00871

**YTCO** YTCO TECHNOLOGY  
 HTTP://WWW.YTCO.CO

TITLE 2.54mm Ejector Header, Straight DIP

PART NO. 3210-XXSXXXX12

DRAWING NO. YT-3210S1

SHEET 1 OF 1

REV A